

# E8TURBOG2W


## 2 MP EXIR Turret Camera



### Key Features

- 2 MP high-performance CMOS
- 1920 × 1080 resolution
- 2.8 mm, 3.6 mm, 6 mm fixed lens
- Day/Night switch
- EXIR 2.0, smart IR, up to 20 m IR distance
- 4 in 1 video output (switchable TVI/AHD/CVI/CVBS)
- IP66

### Dimension

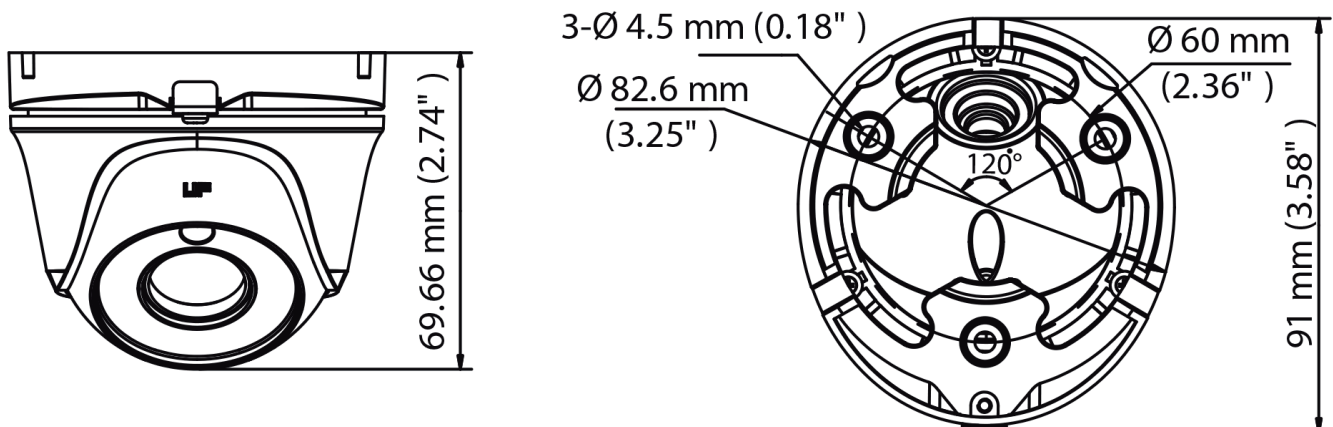

# E8TURBOG2W

## 2 MP EXIR Bullet Camera

### Specification

| Camera                   |                                                                              |
|--------------------------|------------------------------------------------------------------------------|
| Image Sensor             | 2 MP CMOS image sensor                                                       |
| Signal System            | PAL/NTSC                                                                     |
| Resolution               | 1920 (H) × 1080 (V)                                                          |
| Min. illumination        | 0.01 Lux@(F1.2, AGC ON), 0 Lux with IR                                       |
| Shutter Time             | 1/25 (1/30) s to 1/50,000 s                                                  |
| Lens                     | 2.8 mm, 3.6 mm, 6 mm                                                         |
| Horizontal Field of View | 103° (2.8 mm), 80.7° (3.6 mm), 50.1° (6 mm)                                  |
| Lens Mount               | M12                                                                          |
| Day & Night              | IR cut filter                                                                |
| Angle Adjustment         | Pan: 0° to 360°, Tilt: 0° to 75°, Rotation: 0° to 360°                       |
| Synchronization          | Internal synchronization                                                     |
| Video Frame Rate         | PAL: 1080p@25fps<br>NTSC: 1080p@30fps                                        |
| Menu                     |                                                                              |
| AGC                      | High/Medium/Low/Off                                                          |
| D/N Mode                 | Auto/Color/BW (Black and White)                                              |
| BLC                      | Support                                                                      |
| DWDR                     | Support                                                                      |
| Language                 | English                                                                      |
| Functions                | Brightness, Sharpness, DNR, Mirror, Smart IR                                 |
| Interface                |                                                                              |
| Video Output             | 1 HD analog output                                                           |
| Switch Button            | TVI/AHD/CVI/CVBS                                                             |
| General                  |                                                                              |
| Operating Conditions     | -40 °C to 60 °C (-40 °F to 140 °F), Humidity: 90% or less (non-condensation) |
| Power Supply             | 12 VDC ±15%                                                                  |
| Power Consumption        | Max. 4 W                                                                     |
| Protection Level         | IP66                                                                         |
| Material                 | Metal                                                                        |
| IR Range                 | Up to 20 m                                                                   |
| Dimensions               | Ø 82.6 mm × 69.66 mm (Ø 3.38" × 2.74")                                       |
| Weight                   | 230 g (0.51 lb.)                                                             |